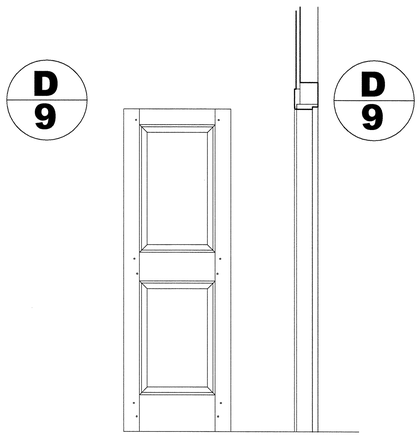

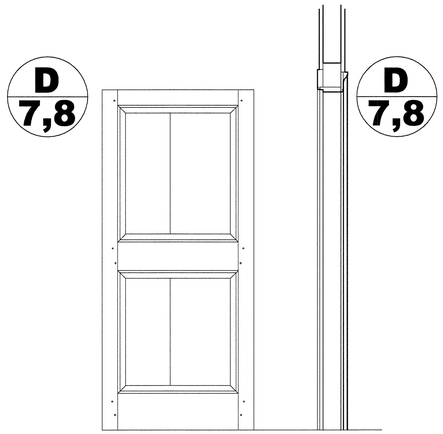

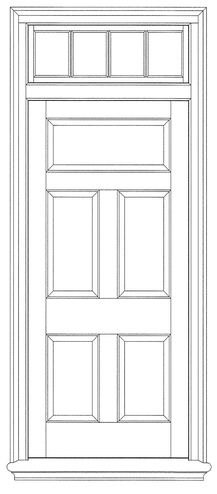

D
1

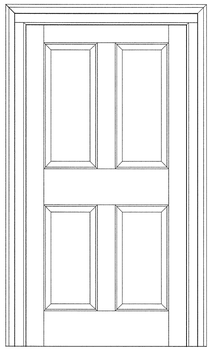

D
2

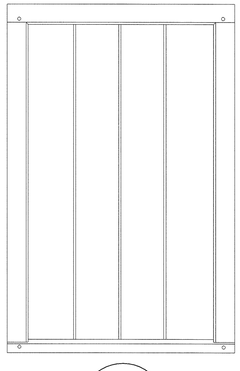

D
3

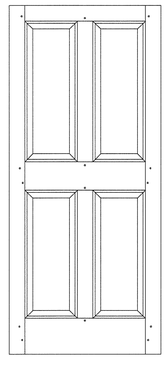

D
6

D
5

D
4

FIRST FLOOR DOORS AND JAMBS

NOTES:
DOOR TO BE MADE OF 100% HEART LONG LEAF YELLOW PINE, 100% CLEAR, MIN. 12 RINGS PER INCH. PANELS TO BE MADE OF ONE BOARD EACH.
ALL STILES AND RAILS TO BE SANDED TO REMOVE MACHINE CHATTER MARKS. PANELS TO BE CAREFULLY HAND PLANED. PROVIDE SAMPLES FOR APPROVAL.
PEGS TO BE 3/8" DIAM. ON FRONT, TAPER TO 11/32" ON REAR. PEGS TO BE APPROXIMATELY ROUND, BY CAREFULLY HAND-DRAWN TO SHAPE.

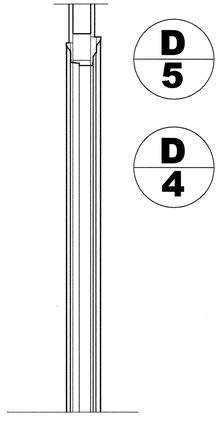

D
5

D
4

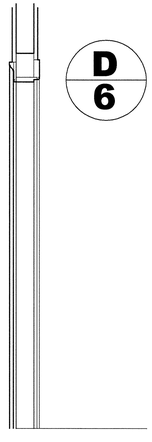

D
6

PRINTS ISSUED

DATE	No.	TO WHOM

CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND TAKE OWN MEASUREMENTS AT THE JOB SITE BEFORE COMMENCING WORK. ADVISE OF ANY ERROR OR DISCREPANCY.

REVISIONS

PROJ. NO.	PROJECT OR SITE
	James Monroe Birthplace

TITLE

DOORS AND DOOR JAMBS

NUMBER

A

105

SCALE	DATE	DRAWN	CHECKED	APPROVED	
3/4"=1'	5.13.2009	JEK			BLK. BLDG.

THE COLONIAL WILLIAMSBURG FOUNDATION

DEPARTMENT OF ARCHITECTURAL RESEARCH